

# 0127 SERIES







Pitch: 2.54mm(0.1"), Pin Header, Single Row, Right Angle S.M.D.

### Specifications

Current Rating: 3 Amp  
 Insulation Resistance: 500 MΩ Min.  
 Dielectric Withstanding: 600 VAC  
 Contact Resistance: 20 mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Copper Alloy  
 Contact Plating: Gold/Tin over Nickel  
 Insulator: Glass Filled Polyester

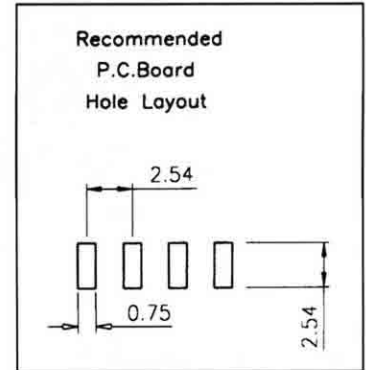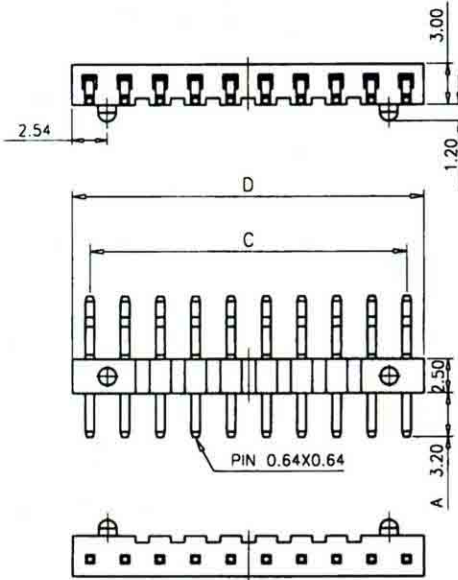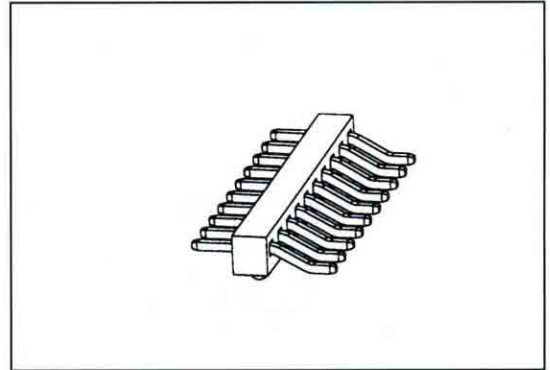

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	5.08	13	30.48	33.02	24	58.42	60.96			
03	5.08	7.62	14	33.02	35.56	25	60.96	63.50			
04	7.62	10.16	15	35.56	38.10	26	63.50	66.04			
05	10.16	12.70	16	38.10	40.64	27	66.04	68.58			
06	12.70	15.24	17	40.64	43.18	28	68.58	71.12			
07	15.24	17.78	18	43.18	45.72	29	71.12	73.66			
08	17.78	20.32	19	45.72	48.26	30	73.66	76.20			
09	20.32	22.86	20	48.26	50.80						
10	22.86	25.40	21	50.80	53.34						
11	25.40	27.94	22	53.34	55.88						
12	27.94	30.48	23	55.88	58.42						

## Ordering Information

0127 - 2 9 6 - XX 0  
 2: Gold Position