

0161 SERIES








2.54x2.54mm(0.1"x0.1"), Female Header, Dual Row, Straight.

Specifications

- Current Rating: 3 Amp
- Insulation Resistance: 500 MΩ Min.
- Dielectric Withstanding: 600 VAC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature:-40°C to +105°C

Materials

- Contact Material: Copper Alloy
- Contact Plating: Gold/Tin over Nickel
- Insulator: Glass Filled Polyester(UL 94V-0)

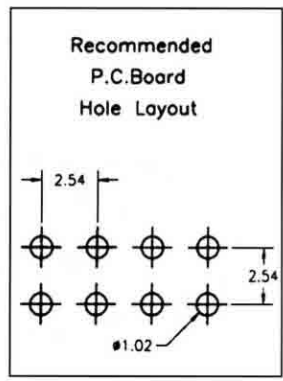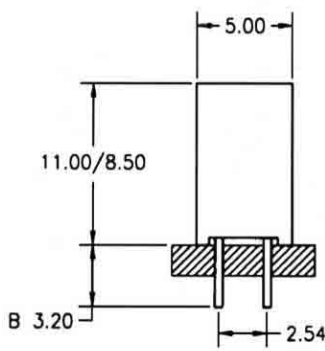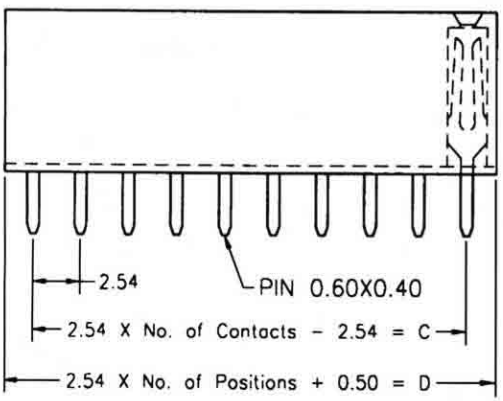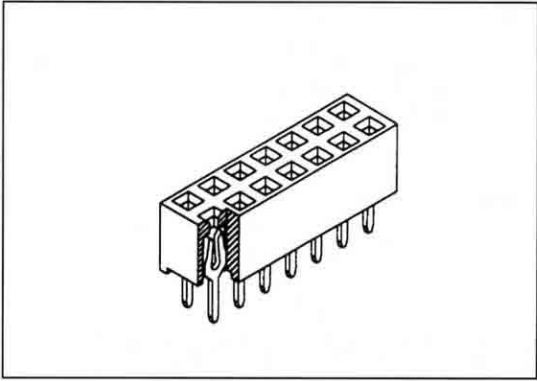

No. of Pins/Row	Dimension Information	
	C	D
02	2.54	5.58
03	5.08	8.12
04	7.62	10.66
05	10.16	13.20
06	12.70	15.74
07	15.24	18.28
08	17.78	20.82
09	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98

No. of Pins/Row	Dimension Information	
	C	D
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92

No. of Pins/Row	Dimension Information	
	C	D
24	58.42	61.46
25	60.96	64.00
26	63.50	66.54
27	66.04	69.08
28	68.58	71.62
29	71.12	74.16
30	73.66	76.70
31	76.20	79.24
32	78.74	81.78
33	81.28	84.32
34	83.82	86.86

No. of Pins/Row	Dimension Information	
	C	D
35	86.36	89.40
36	88.90	91.94
37	91.44	94.48
38	93.98	97.02
39	96.52	99.56
40	99.06	102.10

Ordering Information

0161 - X X X — X X 0

1: Tin 塑高 = 8.50(161-x30-xx0) Position

2: Gold 塑高 = 11.00(161-x310xx0)

3: Half Gold